



Modificación IC-7600 Apertura en RX y TX



Aunque dispongo de las instrucciones de **ICOM** para hacer ésta modificación, he encontrado en la red éstas que dicen como hacerlo más detalladamente.

Enjoy



ICOM IC-7600 - Extended T

Remove top and bottom covers and the hand

Remove the 4 screws (2 on each side) holdin

Remove the 4 connectors to the main unit ca


Remove the metal cover upon the logic unit (

WARNING: The diodes are not in the correc
IC-7700/7800 !!!

You will find the diodes at the right corner of
processor chip and VFO-knob.

Left

Right

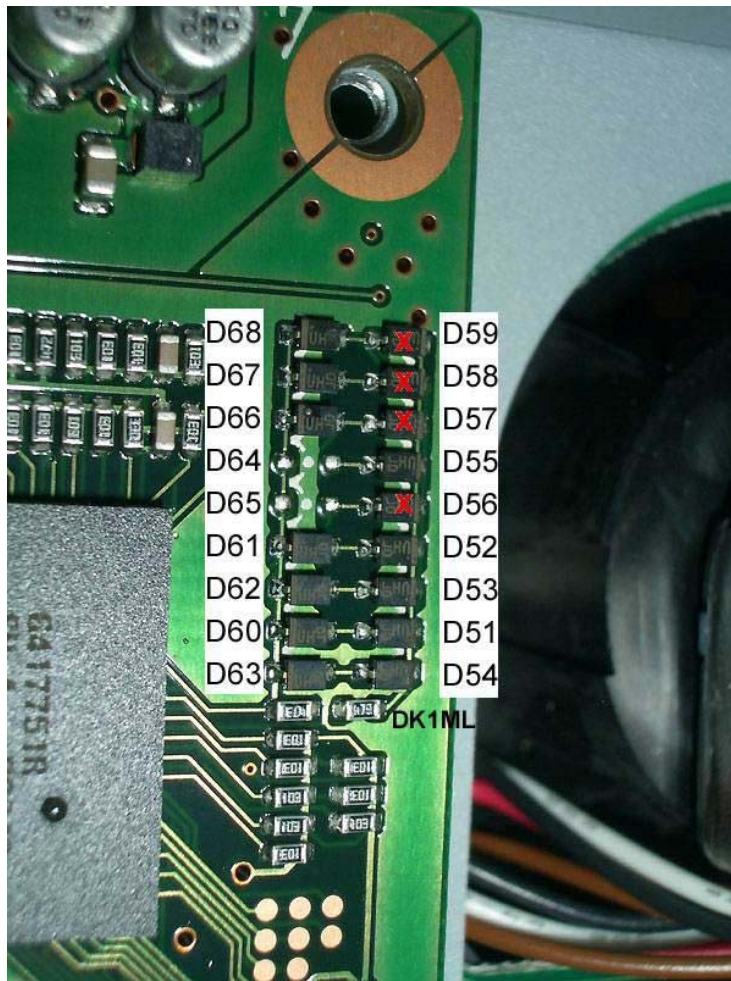

IMS0 D68 RT50	D59 TXF0
IMS1 D67 DLTX	D58 TXF1
IMS2 D66 MTON	D57 TXF2
IMS4 D64 -EMER	D55 RXF0
IMS3 D65 -KANA	D56 TXF3
IMS7 D61 +	D52 RXF3
IMS6 D62 +	D53 RXF2
IMS8 D60 +	D51 TFRA
IMS5 D63 PAL	D54 RXF1

In the EU-Version all Diodes except D64 and

> For full TX-Coverage remove D56, D57, D

> For full RX-Coverage remove D52, D53, D

D51 must be always mounted.

No reset is necessary.

Have fun!

Before you do anything, please read this.!

The modifications are not verified and tested.
 your own equipment, it's on your own risk.
 Performing modifications of some equipment
 you have any doubts, do not perform the mod